



WWW.AMERICANDISH.COM

**AWS / AWS-H Series**

**CAUTION:**


Electrical and Plumbing connections must be made by a qualified Service Person who will assure that the installation is in compliance with all applicable federal, state, and local Health, Electrical, Plumbing, and Safety codes.

**NOTE:**


Manufacturer reserves the right to modify these Specifications in compliance with regulatory agencies and manufacturing expediency.

**ATTENTION:**

All dimensions listed have a tolerance of + or - 1/4" unless otherwise noted.

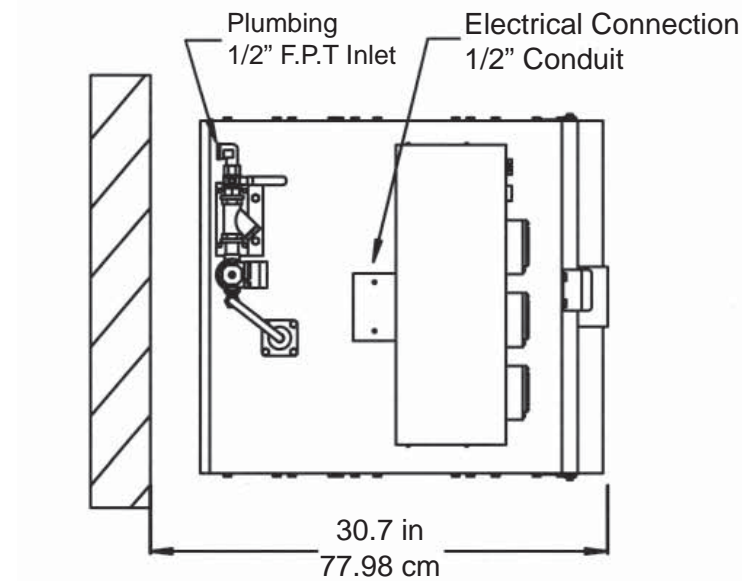

**TOP VIEW**

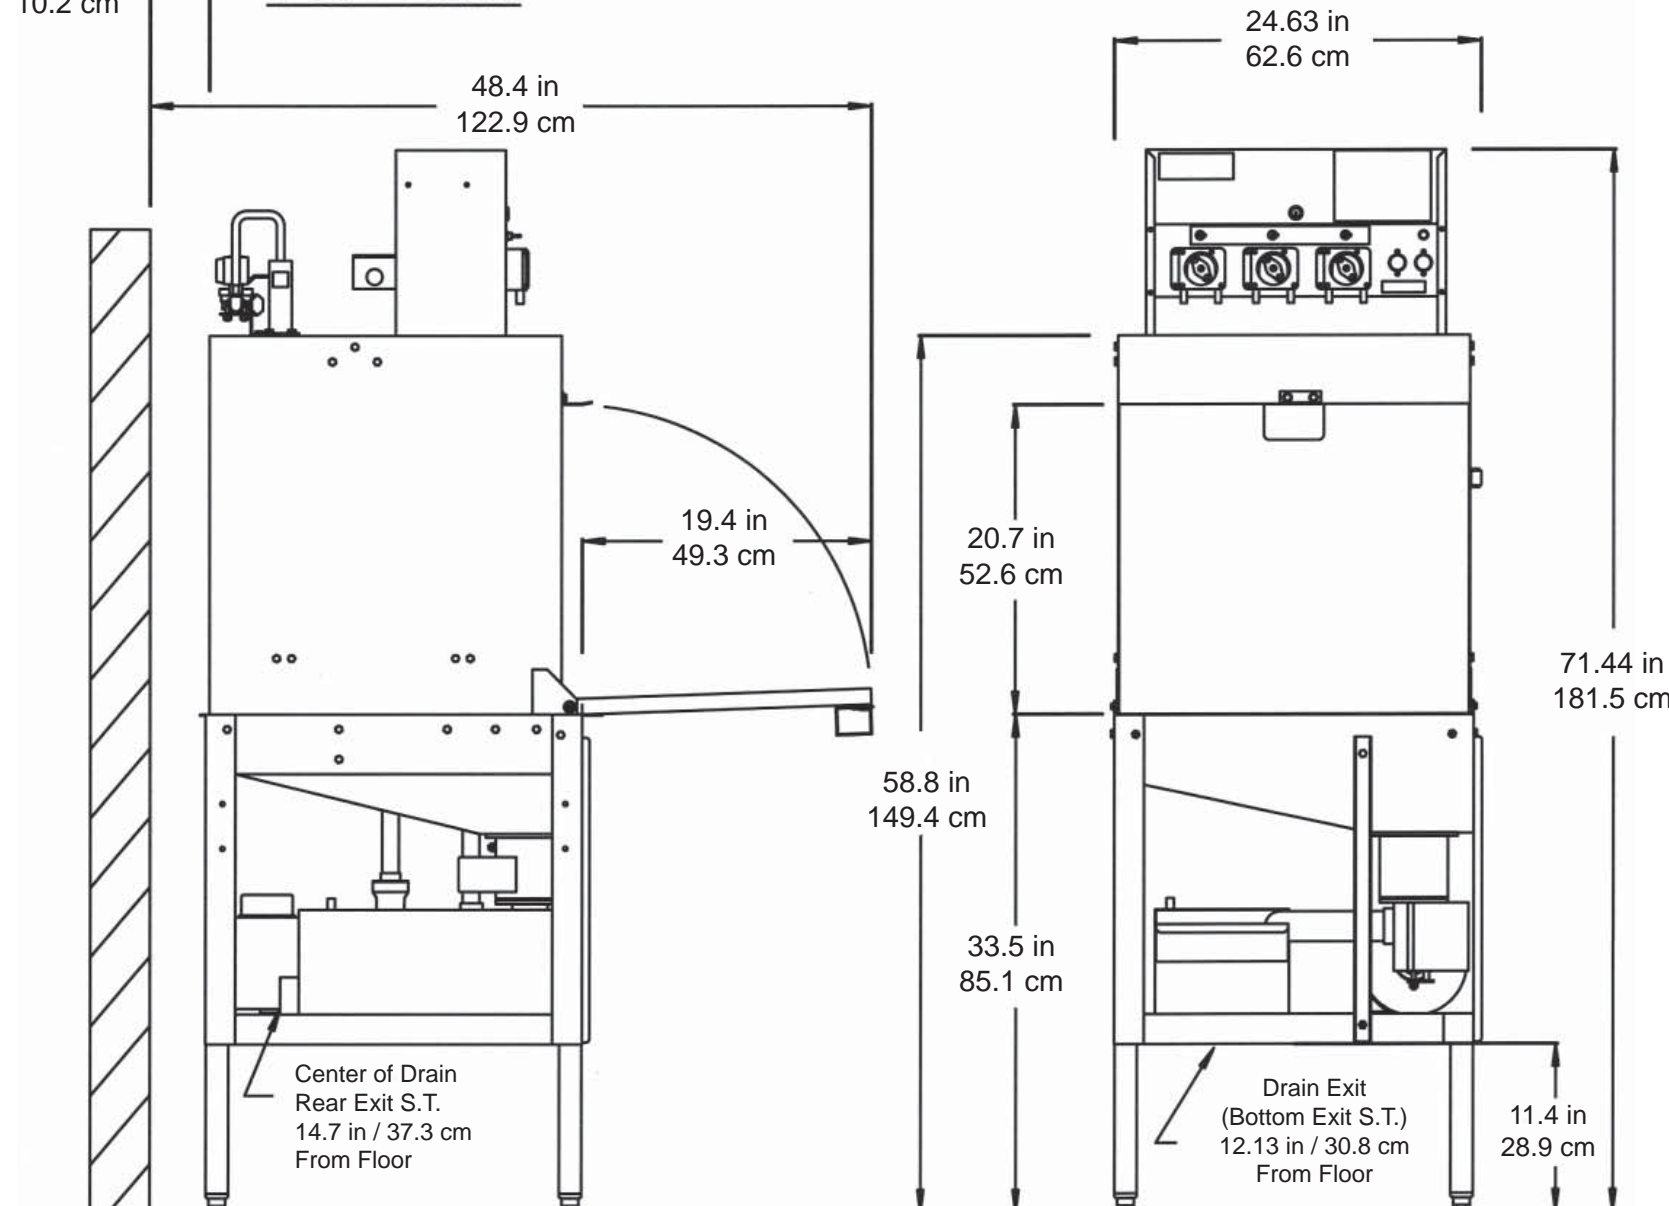

RATED CAPACITY (Racks/Hour)	30	24	20
WASH TIME (Sec.)	50	60	75
RINSE TIME (Sec.)	22	37	52
DWELL (Sec.)	18	23	23
TOTAL CYCLE TIME (Sec.)	90	120	150

WATER TEMPERATURE (Supply) 120 °F Min.  
48.9 °C Min.

WATER CONSUMPTION **AWS** .98 Gal./Cycle **AWS-H** 1.2 Gal./Cycle  
**AWS** 3.7 Liter's/Cycle **AWS-H** 4.5 Liter's Per Cycle

MOTOR 1.5 HP  
1.125 KW

ELECTRICAL RATINGS 115 Volts  
Single Phase  
Connect to Supply Source using 10-12 AWG copper wires on a clean circuit. Circuit Protection: 20 Amp Circuit Breaker or Fuse with a 20 Amp Rating.

RACK SIZE 19 3/4 in x 19 3/4 in  
50.2 cm x 50.2 cm

DOOR CLEARANCE 19 1/4 in(H) x 20 in(W)  
48.9 cm x 50.8 cm

WATER INLET 1/2" F.P.T.  
DRAIN (Scrap Trap) 2" Pipe  
HEIGHT 71.4 in

WIDTH (Overall) 181.5 cm  
24.63 in

DEPTH (From Wall) 62.6 cm  
30.7 in

DEPTH (Door Open From Wall) 77.98 cm  
48.4 in

SHIPPING WEIGHT(Overshelf, Booster, & Undershelf Incl.) 122.9 cm  
354 lb.

SHIPPING VOLUME (36" x 36" x 72") 160.6 kg  
54 cu. ft.

1.52 cu. meters